



Reports Control Symbol
OSD-1366

RESEARCH AND DEVELOPMENT TECHNICAL REPORT ECOM - 5827

BALLISTIC SPHERE TECHNIQUES FOR MEASURING ATMOSPHERIC PARAMETERS

By

Bruce W. Kennedy
Atmospheric Sciences Laboratory

US Army Electronics Command
White Sands Missile Range, New Mexico 88002

and

James K. Luers University of Dayton

Research Institute

July 1977

Approved for public release; distribution unlimited.



UNITED STATES ARMY ELECTRONICS COMMAND - FORT MONMOUTH, NEW JERSEY 07703



NOTICES

Disclaimers

The findings in this report are not to be construed as an official Department of the Army position, unless so designated by other authorized documents.

The citation of trade names and names of manufacturers in this report is not to be construed as official Government indorsement or approval of commercial products or services referenced herein.

Disposition

Destroy this report when it is no longer needed. Do not return it to the originator.

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered) READ INSTRUCTIONS REPORT DOCUMENTATION PAGE BEFORE COMPLETING FORM 2. GOVT ACCESSION ECOM-5827 5. TYPE OF REPORT & PERIOD COVERED TITLE (and Subtitle) BALLISTIC SPHERE TECHNIQUES FOR MEASURING R&D Technical Report ATMOSPHERIC PARAMETERS. 8. CONTRACT OR GRANT NUMBER(s) ruce W. Kennedy James K. Luers PERFORMING ORGANIZATION NAME AND ADDRESS PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS Atmospheric Sciences Laboratory White Sands Missile Range, New Mexico 88002 1T765702D127 11. CONTROLLING OFFICE NAME AND ADDPESS US Army Electronics Command Fort Monmouth, New Jersey 07703 36 14. MONITORING AGENCY NAME & ADDRESS(if different from Controlling Office) 15. SECURITY CLASS. (of this report) Unclassified 15a. DECLASSIFICATION DOWNGRADING 16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited. 17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report) 18. SUPPLEMENTARY NOTES 19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Atmospheric density Ballistic sphere Meteorological rocket 20. ABSTRACT (Continue on reverse side if necessary and identify by block number) A near real-time method for measuring atmospheric winds, temperature, density, and pressure was initiated and tested by the US Army Atmospheric Sciences Laboratory at White Sands Missile Range (WSMR), New Mexico. The technique used a 0.1-m sphere deployed from a small meteorological rocket and tracked by a high precision radar to acquire data from position measurements. Total elapsed time from launch to sphere impact was 11 to 13 minutes. Spheres were tracked by several radars, and comparable temperatures were attained between spheres. Comparisons


DD 1 FORM 1473 EDITION OF 1 NOV 65 IS OBSOLETE

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)
20. ABSTRACT (cont)
of temperature with independent radiosondes and rocketsondes were also made and showed good agreement with two identifiable bias areas at 25 km and 35 km. Wind data showed excellent comparability with differences in direction occurring primarily in light wind conditions of less than 10 m/s.

PREFACE

This work was funded by the US Army Ballistic Missile Defense Advanced Technology Center, Melvin T. Capps, program manager.



CONTENTS

	Page
PREFACE	1
INTRODUCTION	3
THE BALLISTIC SPHERE	3
FLIGHT TESTS	4
RADAR ERRORS	6
DATA REDUCTION	11
ANALYSIS OF FLIGHTS	13
CONCLUSIONS	23
REFERENCES	28

INTRODUCTION

In response to a request from Ballistic Missile Defense Advanced Technology Center (BMDATC), a program to measure the atmospheric parameters of temperature and wind in real time was initiated at WSMR, New Mexico. The requirement was to determine the feasibility of making the measurements in near real time by using ballistic sphere techniques. Near real time for this purpose is defined as collecting the required data between 5 and 50 km altitude within 15 minutes of an initial command. The ballistic sphere is a passive device deployed from a meteorological rocket and tracked by a ground-based radar. Data are derived solely from the radar position information recorded during sphere descent.

THE BALLISTIC SPHERE

For approximately 15 years inflatable spheres deployed from meteorological rockets have been used to measure atmospheric winds and temperature and to derive density and pressure between 30 and 90 km altitude. In 1972 the Meteorological Rocket Network [1,2] started a routine sounding program at five locations using a 1-m inflatable sphere deployed from a Super Loki rocket system. Data accuracies vary from 2 percent rms between 30 and 80 km to 10 percent rms at 90 km altitude. Uncertainties are caused primarily by radar noise and computer program filtering bias. The computer program devised by the University of Dayton Research Institute (UDRI) under contract to Air Force Geophysics Laboratories (AFGL) [3] (formerly Air Force Cambridge Research Laboratories) uses equations of motion, an initial assumption of temperature, measured drag values, radar data, and hydrostatic equations to calculate the atmospheric parameters. The theory and discussions of accuracies are covered in the cited reference. The simplified equations used in the computations are as follows:

Density

$$\rho = \frac{2m (g_z - \ddot{z})}{C_d^{AV} (\dot{z} - w_z)}$$

where m = mass of sphere, g_z = gravity (vertical) \dot{z} , \ddot{z} = vertical velocity and acceleration of sphere, C_d = drag coefficient, A = sphere cross sectional area, V - velocity of sphere with respect to the atmosphere, and w_z - vertical wind velocity.

Wind

$$W_x = \dot{x} - \frac{\ddot{x}z}{\ddot{z} - g_z}, W_y = \dot{y} - \frac{\ddot{y}z}{\ddot{z} - g_z}$$

W and W are wind velocity in the X and Y directions and \dot{x} , \ddot{x} , \dot{y} , and \ddot{y} are sphere velocity and acceleration in X and Y directions.

Pressure

$$P_{i} = P_{i-1} + \int_{i-1}^{z} i \rho g dz$$

NOTE: An initial pressure $\mathbf{P}_{_{\mathrm{O}}}$ is computed from an initial temperature estimate by using the equation

$$P_o = T_o \rho_o \frac{R}{M_a}$$

where R is universal gas constant; M_a is molecular wt of air.

Temperature

$$T = \frac{PMa}{R\rho}$$

For the BMDATC requirement a new set of sphere criteria had to be devised. The sphere size had to be on the order of 0.1-m diameter so that it would fit into an existing rocket. The mass and diameter had to be calculated for proper rate of fall. The relationship between Mach number, Reynolds number, and drag coefficient had to fit the altitude region between 5 and 50 km. To achieve these goals, theoretical trajectories for several spheres were computed, and a 0.1-m, 0.100 kg candidate was selected (Table 1) as optimum.

Table 1 is broken into five sections. Section 1 lists the altitudes at which the sphere has vertical accelerations of -7 and -3 $\mathrm{msec^{-2}}$, the altitude band of vertical velocities greater than Mach 1, and the altitude at which the Reynolds number exceeds 2 x 10^5 . It is at this point that air flow around the sphere becomes turbulent. Derived thermodynamic data is degraded. Section 2 tabulates time of fall in various regions of the trajectory. Section 3 is a computation of temperature errors caused by assumed vertical motion of the atmosphere. Section 4 describes one-sigma errors of temperature at various altitudes caused by radar noise. Section 5 lists the theoretical temperature biases errors at 55, 50, and 45 km.

FLIGHT TESTS

Two sphere sizes were used during this program: a 0.12 m and a 0.1 m. The former was utilized because it was readily available, while the smaller sphere had to be fabricated to order. Fortunately, a larger

TABLE 1 COMPUTED TRAJECTORY CHARACTERISTICS OF 0.1-m SPHERE DEPLOYED AT 80 km aLTITUDE

	100 gram	150 gram	200 gram
1. Alt for $z = -7 \text{ m/s}^2$	63.73 km	61.38 km	59.93 km
Alt for $z = -3 \text{ m/s}^2$	56.94 km	54.75 km	53.23 km
Alt band for Mach No. >1	36.89 km 78.62 km	34.15 km 78.62 km	32.16 km 78.62 km
Alt for turbulent flow Re No. > 2×10^5	<100 m	2.43 km	4.1 km
2. Time of fall 50 to 20 km	2 min 23 s	1 min 58 s	1 min 43 s
Time of fall 50 to 10 km	5 min 38 s	4 min 41 s	4 min 8 s
Time of fall apogee to 4 km	10 min 0 s	8 min 33 s	7 min 44 s
Time of fall 50 km to Re No. $> 2 \times 10^5$	9 min 33 s	7 min 57 s	6 min 21 s
3. Temp error at 50 km for retical wind of 2 m/s	1.851°K	1.710°K	1.644°K
from $\Delta W_z = 1 \text{ m/s at } 40 \text{ km}$	1.268°K	1.013°K	0.915°K
from $\Delta W_2 = .5 \text{ m/s at } 30 \text{ km}$	1.189°K	0.971°K	0.877°K
ΔT from $\Delta W_z = .1$ m/s at 20 km	0.555°K	0.459°K	0.396°K
ΔT from ΔW_z = .1 m/s at 10 km	1.186°K	1.003°K	0.701°K
4. Estimated temp error due to radar noise			
o _T 55 km	1.4478°K	1.937°K	2.307°K
о _т 50 km	0.9917°K	1.180°K	1.267°K
o _T 40 km	0.8611°K	0.715°K	0.676°K
o _T 30 km	1.4375°K	1.247°K	1.129°K
o _T 20 km	2.9672°K	2.490°K	2.185°K
$\sigma_{ m T}$ 10 km	6.0480°K	5.146°K	4.644°K
5. Temperature bias error	7.96°K at 55 km 5.41°K at 50 km	9.29°K at 55 km 6.75°K at 50 km	
estimation	2.64°K at 45 km	2.07°K at 40 km	

rocket, the XM75 [4], was available at the beginning of the tests, and no program delays were encountered.

The sphere was made of two-piece thin-wall spun aluminum, welded at the equator. It was mounted on a lathe and turned in two directions to give a final diameter tolerance of $\pm .13$ mm and a medium polished surface smoothness. Two molded plastic pieces were placed fore and aft of the sphere, and the assembly with appropriate spacers was loaded into the rocket (Fig. 1). The rocket was launched at a quadrant elevation of 80° and reached altitudes of 60--70 km (Fig. 2). At that point a 110--second pyrotechnic delay detonated a small explosive charge and the sphere was ejected into the atmosphere. Radars acquired the sphere and tracked its descent to impact 11 to 13 minutes later. Rate of fall reached 500 m/sec at 55 km (Fig. 3).


Severe radar acquisition problems were encountered on almost every mission. The number of pieces ejected at expulsion varied from three to four depending on the assembly configuration, and proper identification of the sphere was difficult. The FPS-16 and MPS-36 radars at WSMR did not have discrimination capability, and operation judgment was the only source of target selection available. Many variations of assembly techniques, multiple radar assignments, and multiple target assignments were tried, but acquisition of the sphere remained a problem throughout the program. A number of spheres were flown where little or no data were recorded. This problem should be virtually eliminated when discrimination radars are used.

RADAR ERRORS

On 8 December 1975, three ballistic spheres of approximately 135 g mass and 0.12 m diameter were launched. The three launches were tracked by four radars: three FPS-16 and one MPS-36 radar. The FPS-16 radars are designated by the numbers, R112, R113, and R114; and the MPS-36 is R354.

Radar tracking accuracies were calculated from the 8 December flights where four radars were used to simultaneously track each sphere. The standard deviation of the error in range was estimated by differencing the ranges from two radars. Assuming that the radar errors are independent and of equal variance, the standard deviation of the difference between range values divided by the square root of 2 is an estimate of the one-sigma slant range error for each radar. Table 2 shows the onesigma error in range, azimuth, and elevation using various combinations of the radars. From this table, the following conclusions can be made. The FPS-16 radars performed as expected with regard to slant range tracking errors of 3 to 6 m. However, the azimuth and elevation errors are three to four times as large as observed in tracks of larger 1-m spheres [3]. The MPS-36 radar exhibits somewhat larger tracking errors than the FPS-16 radar. Nevertheless as will be seen later, the MPS-36 radar is of sufficient quality to provide reasonable accuracy in temperature and wind measurements from the ballistic sphere. The significantly higher errors

XM-75 CALIBRATION SPHERE SYSTEM

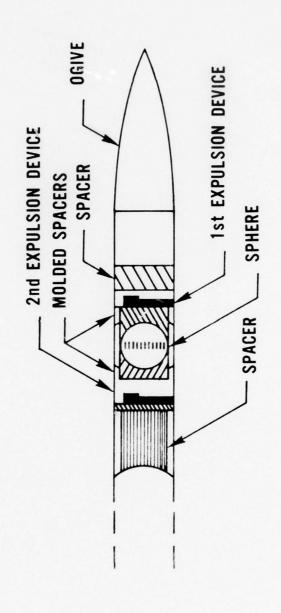

Assembly cross section of the sphere in the XM-75 rocket. Plastic spacers are molded around the sphere to prevent damage during the expulsion process. Figure .


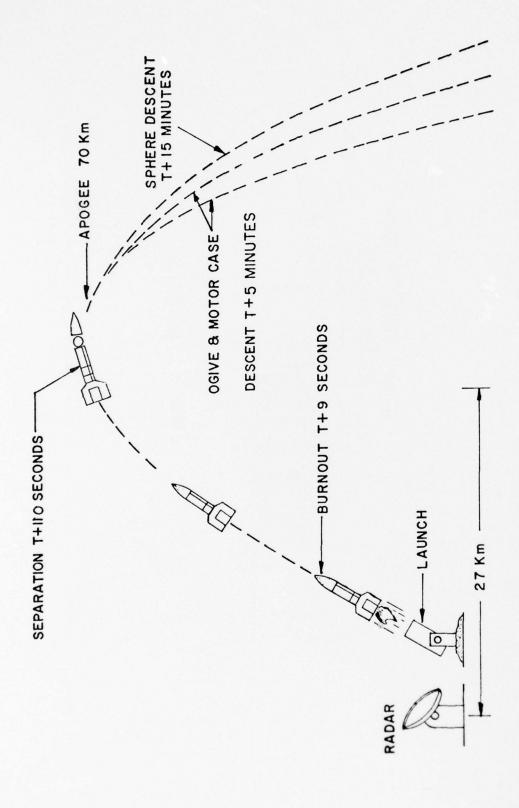


Figure 2. Typical sequence of events during a sphere flight.

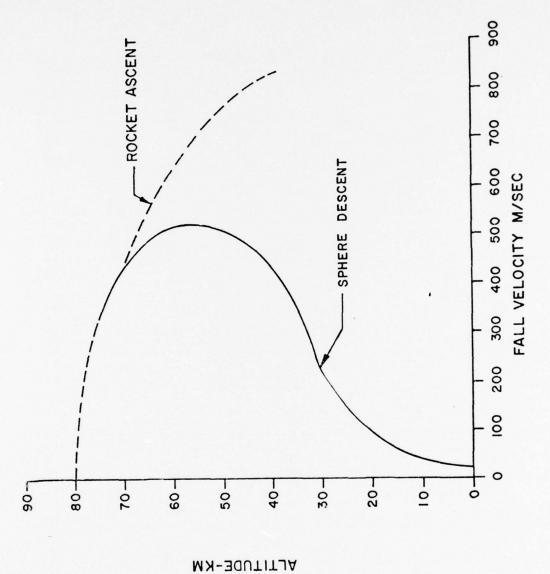

Fall velocity as a function of altitude for a rigid sphere deployed from a meteorological rocket at 70 km altitude. Figure 3.

 $\label{eq:table 2} \mbox{NOISE LISTED IN ORDER OF:} \quad \sigma_{R}(m) \mbox{, } \sigma_{E}(mils) \mbox{, } \sigma_{A}(mils)$

.682 .462 .22 .188 .550	69 3. 442 525 68 4. 364	.59 4. .388 .323 .71 4. .359	.08 .334 .458	3.01 .344 .343 3.44 .265	2.46 .276 .279	0 km 2.17 .30 .29 3.54
.682 .462 .22 .188 .550	442 525 68 4.	.388 .323 .71 4.	.334 .458 .50	.344 .343 3.44 .265	.276 .279 3.76	.30 .29 3.54
.462 . .22 4. .188 . .550 .	525 68 4. 364	.323 .71 4.	.458 .50 .312	.343 3.44 .265	.279 3.76	3.54
.22 4. .188 .	68 4. 364	.71 4. .359	.50 .312	3.44 .265	3.76	3.54
.188 . .550 .	364	. 359	.312	.265		
.550 .					.236	.25
	369	,495	375			
.81 4			• 57.5	. 361	.273	.28
	78 4.	.35 4.	. 86	3.45	3.35	3.17
.596	433	.375	. 351	.331	.312	.22
.628	451	,423	.548	.380	.388	.36
.31 3.	92 3.	.47 4.	.23	3.69	3.19	3.03
.212 .	407	472	. 327	.349	.392	. 31
.492 .	347	.333	. 380	.321	.272	. 32
.45 6.	16 4.	.10 3.	.57	3.54	3.70	3.53
.441 .	464	. 327	. 367	.287	.295	.23
.654	777	,489	.318	. 338	.384	.31
.84 7.	47 4.	.25 4	.24	3.49	3.71	3.84
.308	465	, 378	. 343	.278	.307	.22
.510 1.	151	.475	. 331	.264	.298	. 33
.90 4.	61 3,	.64 4	.52	3.44	3.44	3.49
.502	296	.597	. 392	.324	.323	.28
.547	553	287	. 377	.329	.325	. 29
.26 6.	29 4.	.36 4	.29	3.99	3.97	4.10
.479 .	433	408	.408	.378	.340	.25
.849 1.	192	.441	.439	.416	.402	. 39
.74 8.	43 3,	.51 3.	.99	3.38	3.02	2.87
.467	445	480	. 387	.269	.201	.26
.766 1.	148	. 393	.440	. 367	.320	. 29
	628	.628 .451	.628 .451 .423 .31 3.92 3.47 4 .212 .407 .472 .492 .347 .333 .45 6.16 4.10 3 .441 .464 .327 .654 .777 .489 .84 7.47 4.25 4 .308 .465 .378 .510 1.151 .475 .90 4.61 3.64 4 .502 .296 .597 .547 .553 .287 .26 6.29 4.36 4 .479 .433 .408 .849 1.192 .441 .74 8.43 3.51 3 .467 .445 .480	.628 .451 .423 .548 .31 3.92 3.47 4.23 3 .212 .407 .472 .327 .492 .347 .333 .380 .45 6.16 4.10 3.57 .367 .441 .464 .327 .367 .654 .777 .489 .318 .84 7.47 4.25 4.24 .308 .465 .378 .343 .510 1.151 .475 .331 .90 4.61 3.64 4.52 .502 .296 .597 .392 .547 .553 .287 .377 .26 6.29 4.36 4.29 .3 .479 .433 .408 .408 .849 1.192 .441 .439 .74 8.43 3.51 3.99 .3 .74 8.43 3.51 3.99	.628 .451 .423 .548 .380 .31 3.92 3.47 4.23 3.69 .212 .407 .472 .327 .349 .492 .347 .333 .380 .321 .45 6.16 4.10 3.57 3.54 .441 .464 .327 .367 .287 .654 .777 .489 .318 .338 .84 7.47 4.25 4.24 3.49 .308 .465 .378 .343 .278 .510 1.151 .475 .331 .264 .90 4.61 3.64 4.52 3.44 .502 .296 .597 .392 .324 .547 .553 .287 .377 .329 .26 6.29 4.36 4.29 3.99 .479 .433 .408 .408 .378 .849 1.192 .441 .439 .416 .74 8.43 3.51 3.99 3.38 .467 .445 .480 .387 .269	.628 .451 .423 .548 .380 .388 .31 3.92 3.47 4.23 3.69 3.19 .212 .407 .472 .327 .349 .392 .492 .347 .333 .380 .321 .272 .45 6.16 4.10 3.57 3.54 3.70 .441 .464 .327 .367 .287 .295 .654 .777 .489 .318 .338 .384 .84 7.47 4.25 4.24 3.49 3.71 .308 .465 .378 .343 .278 .307 .510 1.151 .475 .331 .264 .298 .90 4.61 3.64 4.52 3.44 3.44 .502 .296 .597 .392 .324 .323 .547 .553 .287 .377 .329 .325 .26 6.29 4.36 4.29 3.99 3.97 .479 .433 .408 .408

in azimuth and elevation found in the FPS-16 tracks of the smaller ballistic spheres required a considerably larger smoothing interval to be used in the data processing than for reduction of 1-m sphere data. Thus the computer program previously used for the 1-m inflatable sphere was completely revised, and a new concept of data treatment was devised which reduced program biases.

DATA REDUCTION

The Ballistic Sphere Data Reduction Program (BSDRP) uses radar input of slant range, azimuth, and elevation angles at time increments of 1/10 of a second to produce atmospheric measurements of winds, temperature, density, and pressure for that region of the atmosphere between approximately 2 and 50 km. It was designed to be used either on a real-time computer system or with batch processing. When used on a real-time computational system, output should lag radar computer input by less than 1 minute.

Some of the features of the program are as follows: The program employs quadratic smoothing to obtain the velocities and accelerations needed to solve the equations of motion and obtain atmospheric measurements. The number of data points used in the quadratic smoothing is an input parameter of the program and can be varied at the discretion of the user, depending on size and mass of the sphere. For applications of the 0.12-m, 135-g ballistic spheres with tracking by an FPS-16 radar, 63 data points were used in the data processing. The BSDRP also provides the option to effectively increase the smoothing interval at two specified altitudes by successively doubling the time interval. This is achieved by averaging consecutive data points. Thus, the number of data points used in the smoothing remains the same throughout the flight, but the time spacing between data points increases by a factor of 2 each time the smoothing interval is doubled. In the case of the 0.12-m ballistic sphere with FPS-16 radar tracking, the smoothing interval was expanded at 25 km and 10 km to maintain a noise error in temperature of less than 2 degrees over the entire altitude range.

Another feature of the ballistic sphere program is the removal of bias errors resulting from smoothing. This removal was achieved as follows. The initial position and velocity of the ballistic sphere was calculated from the radar data shortly after apogee. From these initial conditions a theoretical sphere trajectory was generated by assuming the sphere fell in the 1962 Standard Atmosphere with no winds present. This theoretical profile was then treated as if it represented radar coordinates. The N-point quadratic smoothing was used to generate atmospheric parameters of winds, temperature, density and pressure. Any differences between the computed parameters and the 1962 Standard Atmosphere values represented bias in the measurements due to smoothing. These differences in density, temperature, and winds were stored in a bias correction array. Bias errors in pressure were not stored since using the ideal gas law, pressure can be determined directly from temperature and density measurements. After generation of the bias correction table, processing of the radar

data continued. Radar data were processed by the ballistic sphere program to provide calculations of winds, density, temperature, and pressure at time increments of 1 second (two seconds after the smoothing interval was expanded). Corrections were then applied to this biased data by determining from the bias correction table the proper correction for the specified altitude. Subtraction of this bias from the BSDRP calculation provided an unbiased estimate of the atmospheric parameters.

Another feature of this program is its ability to remove the often observed unreal temperature perturbation when a sphere penetrates Mach 1. This fictitious oscillation results from an inability to accurately calculate the drag coefficient as it passes through Mach 1. The bias error correction technique employed in this program effectively removes this oscillation.

The program also provides an estimate of the noise errors in the computed values of winds, temperature, density, and pressure by assuming independent radar errors in range of 5 m and in azimuth and elevation of 0.4 mil. These radar error estimates were obtained by differencing coordinates from dual FPS-16 radar tracks of the 0.12 m ballistic spheres.

The BSDRP ballistic sphere program was designed for use with the CDC 6600 computer but was adapted to the Univac 1108 computer at WSMR. During flight tests, radar data were transmitted to a central recording facility and recorded on a packed magnetic tape. Tapes were then used with the computer program to produce a data list. Delayed time processing of 15-20 minutes from launch time was successfully accomplished.

With each firing, or set of firings, a conjunctive radiosonde (RAOB) and rocketsonde (ROCOB) observation was made. The radiosonde ascended on a balloon and measured temperature, pressure, and winds between the surface and 30 km. The rocketsonde descended on a parachute and measured temperature and winds between 65 km and 25 km. Comparisons were then made between data collected from the ballistic sphere and the independent techniques. Comparisons were also made between the various radars tracking the same sphere. Because of operational constraints a time and space variation existed between the conjunctive measurements and spheres which could account for part of the observed differences. Rocketsonde and radiosonde temperature accuracies are typically $\pm 2^{\circ}\mathrm{C}$ rms [2].

Generally, the temperature data from ballistic spheres appeared to be valid between 5 km and about 42 km altitude. Above 42 km, the data deviates significantly from the rocketsonde observation. This deviation may have been caused by excessive radar noise or magnus forces induced by the spinning sphere. Below 5 km, the sphere entered drag crisis where the drag coefficient changed rapidly with very little change in Reynolds number [5].

ANALYSIS OF FLIGHTS

Figure 4 is typical of data collected from a 0.120 m sphere. On this mission, launched on 8 December 1975, four radars tracked the sphere simultaneously. Differences in data, therefore, are directly attributable to individual radar errors. There is generally excellent agreement between 4 and 20 km altitude. Between 20 and 35 km, the temperature values differ by up to 7°K with the greatest difference coming from the MPS-36. Above 35 km, there is a gradual divergence up to about 10°K at 50 km. Radars 112 and 114 show excellent agreement over the entire range from 4 to 42 km. Above 50 km, the data is not usable. The difference between temperatures derived from the various radars may, in addition to inherent radar capability, be largely influenced by the servobandwidth of the radar. Tracking at a low servobandwidth can produce the type of oscillation observed in radars R113 and R354.

Figure 5 compares radar 114 with data collected from conjunctive rocket-sonde and radiosonde on the same day. Two distinct biases appear, one at 24 km (10° K) and the other at 35 km (5° K). The data diverge significantly above 42 km and probably reflect the upper limit of this ballistic sphere measurement system.

Figure 6 compares the temperature data derived from five radars tracking a single 0.1-m sphere launched on 7 October 1976. There is excellent agreement between 4 and 25 km, then differences of up to 10°K between 30 and 35 km, and up to 7°K between 35 and 42 km. Figure 7 is a temperature comparison between the sphere and the ROCOB/RAOB measurements. One radar was selected as representative. Again, the biases appear at 25 and 35 km. At 25 km the sphere-derived temperature is warmer than the RAOB, and at 35 km the sphere is colder than the ROCOB.

Table 3 lists the observed differences between ROCOB/RAOB and the averaged temperature data from 10 radar tracks of 0.120-m spheres. The biases are quite apparent at 25 and 35 km, with an observed divergence above 42 km. Otherwise, temperature differences are generally within $\pm 2^{\circ}$ K.

Table 4 lists the observed temperature difference between ROCOB/RAOB and the averaged data from 10 radar tracks of 0.1-m spheres. The biases at 25 and 35 km are still evident in approximately the same magnitude and direction. The biases may result from inaccuracies in drag coefficient data, magnus effects induced by the spinning sphere, or possibly other factors. Figure 8 graphically illustrates the statistical differences between spheres and ROCOB/RAOB for both the 0.1- and 0.12-m spheres.

As previously stated, the ROCOB and RAOB data differences are given as $\pm 2^{\circ} \text{K}$ rms. Table 5 lists and Fig. 9 illustrates temperature data collected from four radiosondes flown on 7 October 1976. Release times varied from 0705 to 1030 Mountain Standard Time. Maximum differences occur at 15 to 17 km, with a magnitude of 6°C between the 0730 and 1030 releases.

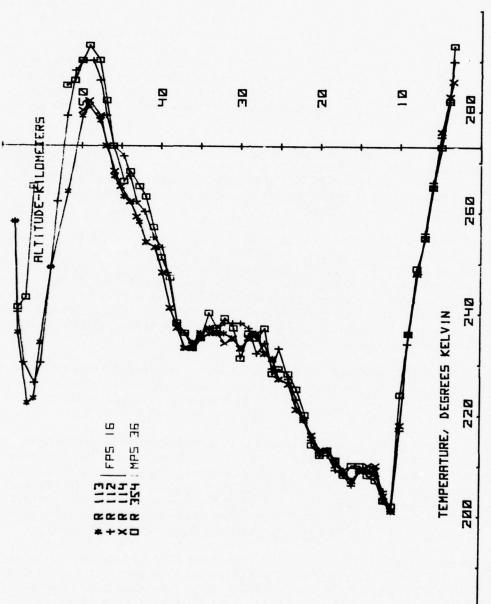


Figure 4. Temperatures derived from four radars tracking a 0.12-m single sphere launched at WSMR on 8 Dec 75.

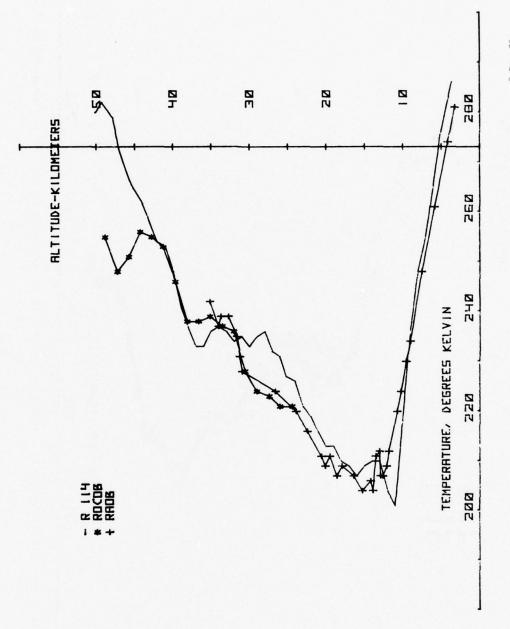


Figure 5. Temperature comparison between 0.12-m sphere tracked by R114 and the ROCOB/RAOB measurements, 8 Dec 75.

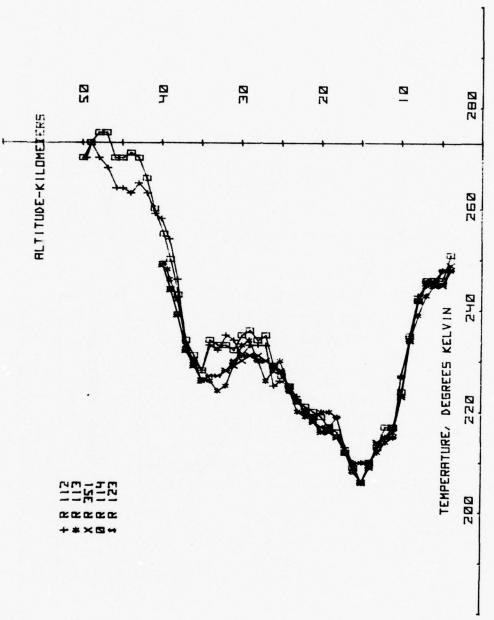


Figure 6. Temperatures computed from radar tracks of a 0.1-m sphere launched 7 Oct 76. Five radars tracked this mission.

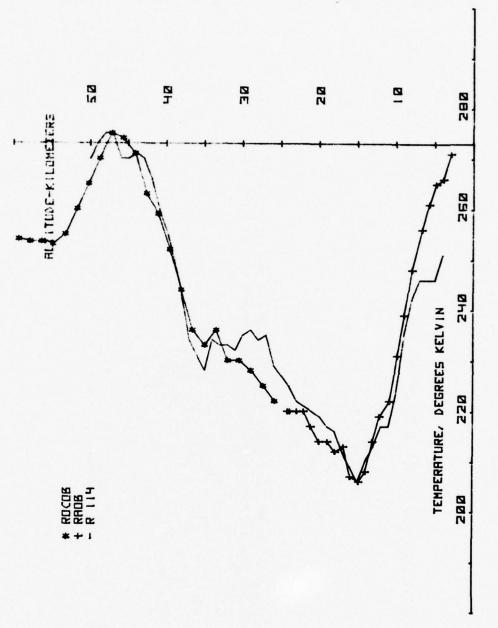


Figure 7. Comparison of temperature data from R114 tracking the 0.1-m sphere and ROCOB/RAOB launched on 7 Oct 76.

TABLE 3 $\label{temperature} \mbox{ TEMPERATURE DIFFERENCE, ROCOB AND RAOB MINUS 0.12-METER SPHERE }$

A14 1	Diff(°K)	C+1 D(01)
Alt-km		Std Dev(^o K)
50	-17.4	11.3
49	-18.3	14.8
48	-22.7	14.4
47	-19.4	11.4
46	-12.1	9.3
45	-5.6	9.5
44	-4.1	8.7
43	-3.0	7.4
42	-2.9	7.1
41	2.0	5.3
40	-1.1	4.8
39	-1.4	4.9
38	1.4	3.6
37	4.4	3.8
36	5.6	1.3
35	5.4	2.6
34	6.9	3.3
33	1.4	1.3
32	0.6	2.6
31	-3.1	4.1
30	-5.3	3.3
29	-6.5	4.2
28	-7.0	3.6
27	-7.3	3.6
26	-6.8	1.4
25	-6.3	3.3
24	-5.3	2.2
23	-3.9	2.2
22	-3.6	2.3
21	-3.3	1.5
20	-3.1	1.0
19	-2.6	1.9
18	-1.1	0.8
17	-0.5	0.9
16	-1.5	1.8
15	-2.8	2.3
14	-0.6	2.1
13	2.6	1.5
12	2.6	5.2
11	10.6	10.0
10	2.3	6.9
9	-1.6	2.5
8	-3.8	2.2
7	-1.7	3.1
6 5	-0.9	6.6
5	-0.9	10.0
4	1.3	12.0

TABLE 4

TEMPERATURE DIFFERENCE, ROCOB AND RAOB MINUS 0.1-METER SPHERE

Alt-km	Diff(^o K)	Std Dev(°K)
50	-4.0	
49	-4.0	
48	-0.5	3.5
47	4.5	5.0
46	7.0	4.2
45	5.0	4.2
44	4.0	5.7
43	-2.5	3.5
42	-5.5	2.1
41	-0.5	0.7
40	1.5	4.8
39	0.5	4.4
38	1.5	2.9
37	6.3	1.0
36	4.0	0.8
35	6.0	1.2
34	5.0	4.1
33	6.0	4.2
32	0.2	4.1
31	-0.8	2.2
30	-2.0	2.0
29	-5.0	2.1
28	-4.6	3.8
27	-3.9	4.8
26	-4.4	2.7
25	-5.3	2.6
24	-3.0	2.3
23	0.2	3.5
22	1.7	2.4
21	-1.5	1.6
20	-2.4	2.5
19	-1.9	3.8
18	-0.9	5.0
17	0.9	1.5
16	-1.7	1.2
15	-0.2	1.9
14	-1.6	1.0
13	0.8	2.8
12	-0.6	2.4
11	3.0	4.1
10	0.6	4.6
9	1.2	4.1
8	1.8	4.6
7	4.7	5.8
6	8.9	8.8
6 5 4	13.4	7.3
4	-5.0	1.4

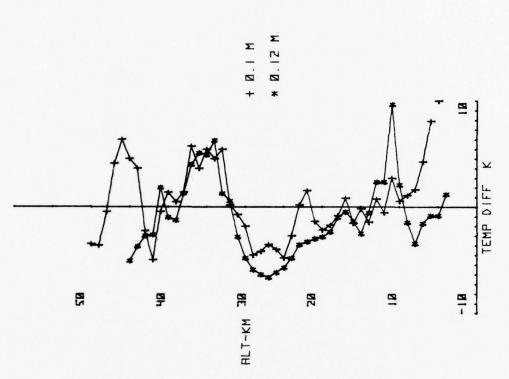


Figure 8. Temperature differences between 0.1-m and 0.12-m spheres and ROCOB/RAOB soundings from 10 radar tracks.

TABLE 5

RADIOSONDE TEMPERATURE TEST, 7 Oct 76

WS-0100; WS-0705; HOL-0715; JAL-0740; JAL-1030 MST

Alt-km	WS (°K)	HOL (°K)	JAL (°K)	JAL (°K)
1.524	281.2	281.0	279.9	281.8
3.048	272.0	271.2	270.6	270.0
4.572	268.8	265.7	264.5	264.3
6.096	258.5	257.8	259.3	259.1
7.620	250.4	248.1	249.3	249.3
9.144	239.1	237.2	238.1	239.3
10.668	225.2	225.1	225.5	227.1
12.192	214.4	214.3	213.8	215.1
13.716	209.9	209.3	209.8	211.5
15.240	205.6	205.4	209.8	211.9
16.764	212.5	212.2	206.3	206.9
18.288	212.1	212.3	210.4	212.4
19.812	216.2	216.1	217.4	214.7
21.336	217.4	214.3	215.6	217.9
22.860	999.0*	220.2	220.8	219.2
24.384	999.0	222.0	222.5	999.0
25.908	999.0	223.6	223.4	999.0
27.432	999.0	224.8	224.1	999.0
28.956	999.0	225.6	226.3	999.0

*999 denotes missing data

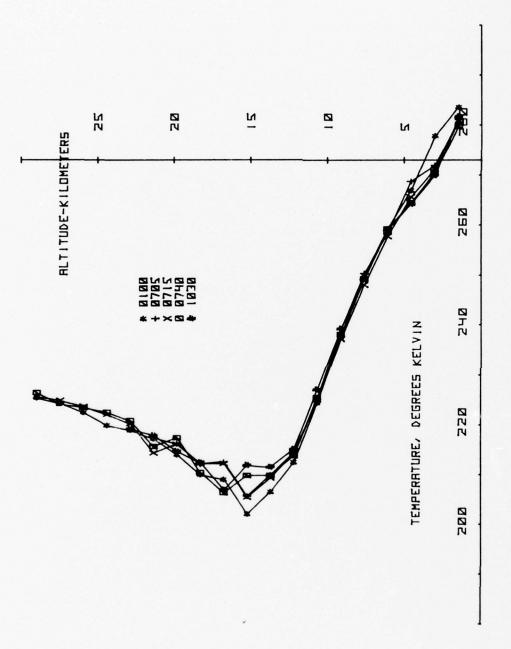


Figure 9. Temperature profiles measured by five RAOBS on 7 Oct 76. Releases were made between 0705 and 1030 MST.

These data are presented only to illustrate a pitfall in comparing two sets of measurements. The natural time and space variability of the atmosphere in addition to nominal system accuracies must be considered.

Figures 10 and 11 show wind speed and direction versus altitude for a 0.12-m sphere flown on 8 December 1975. Data are from two FPS-16 radars and from ROCOB and RAOB. Between 4 and 27 km, the wind speed agreement between the two systems is excellent with differences of only a few meters per second in evidence. Light winds, less than 10 m/sec, were observed only between 17 and 28 km. Between 28 and 40 km, the sphere indicated winds from 5 to 10 m/sec greater than ROCOB/RAOB. The profiles converge at about 40 km and are in good agreement up to 46 km. The data from the two radars is almost identical throughout the entire profile.

Wind direction compares favorably between ROCOB/RAOB and sphere. Points of large variability appear only under light wind conditions. Differences of up to 60° appear at 28 km where the corresponding winds are less than 10 m/sec.

Figures 12 and 13 illustrate wind speed and direction comparisons for a 0.1-m sphere. As in the previous wind profiles, data are taken from two radar tracks of a single sphere and from the conjunctive ROCOB and RAOB. In this case the wind speed is less than 10 m/sec between 18 and 40 km. The corresponding direction graph shows a wide scatter of data. Below 18 and above 40 km, where wind speeds are greater than 10 m/sec, the agreement is generally within 10° .

CONCLUSIONS

The 0.1- or 0.120-m ballistic sphere is a relatively accurate method for the purpose needed of deriving the atmospheric parameters of wind and temperature between 4 and 42 km altitude. Below 4 km, turbulent flow conditions for the sphere prevent the measurement of temperature. Above 42 km, inaccurate radar tracking or tracking at a low servobandwidth prevents accurate temperature and wind measurement. Between 4 and 42 km, temperatures compare favorably with conjunctive radiosondes and rocketsondes with apparent biases occurring at 25 and 35 km. Winds are comparable at all altitudes in both speed and direction except under light wind conditions when wind direction is inaccurate. The technique should be applicable to users requiring fast, real-time measurement of the atmosphere. The bias may usual from inaccuracies in drag coefficient data, magnus force effects on the spinning sphere, or other factors. Additional studies will be required to determine if the biases can be successfully removed.

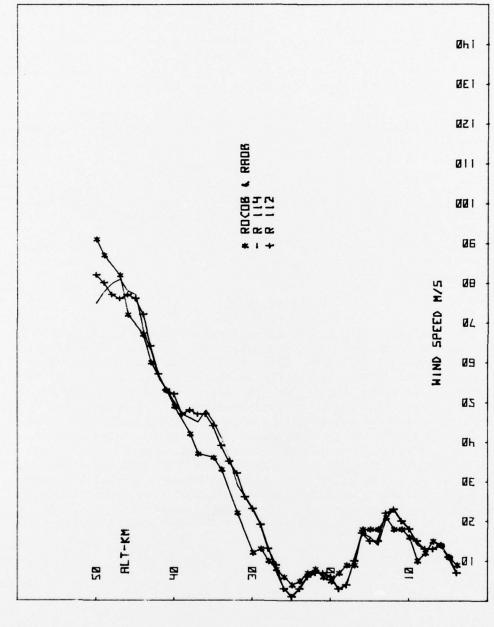


Figure 10. Comparison of wind speed between sphere and ROCOB/RAOB on 8 Dec 75. Sphere is 0.12 m in diameter. Data from R112 and R114 are plotted.

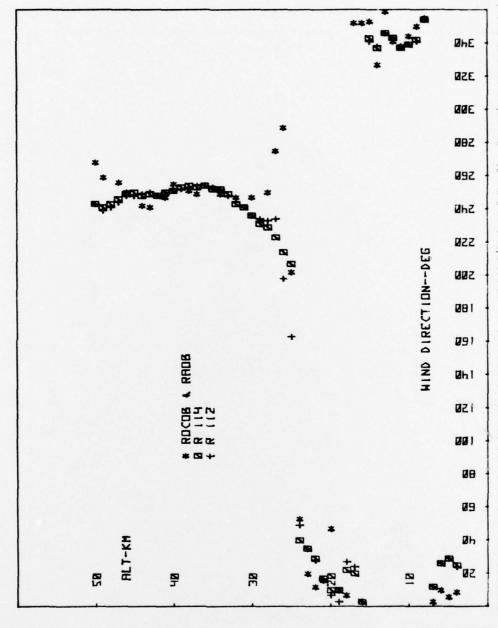


Figure 11. Comparison of wind direction between sphere and ROCOB/RAOB on 8 Dec 75. Two radars are represented.

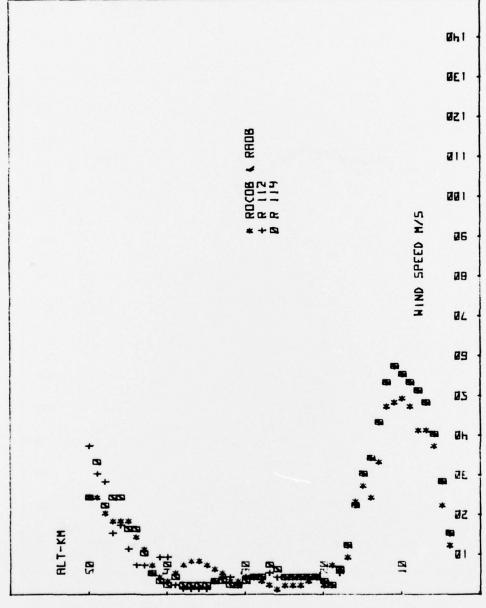


Figure 12. Wind speed comparison between 0.1-m sphere and ROCOB/RAOB on 7 Oct 76. Data from two radars are plotted.

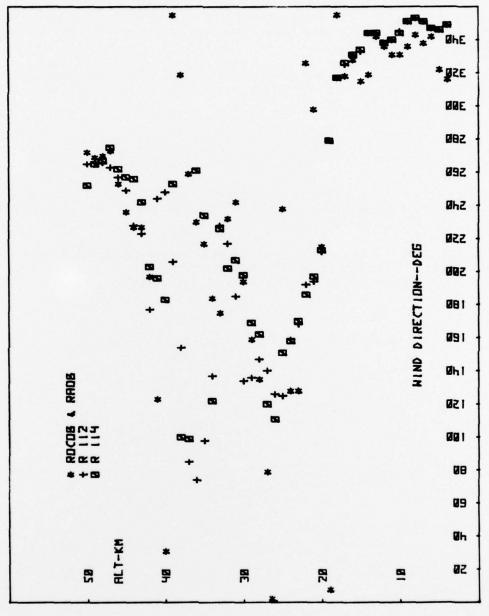


Figure 13. Comparison of wind direction between sphere data and ROCOB/RAOB. Data from R112 and R114 are plotted.

REFERENCES

- 1. "Federal Meteorological Handbook No. 10, Rocketsonde Observations," National Aeronautics and Space Administration, US Dept of Commerce, US Dept of Defense, Jul 75 (available from Supt of Documents, USGPO, Washington, DC 20402).
- 2. "The Meteorological Rocket Network," Inter Range Instrumentation Group, Meteorological Working Group, Doc 111-64, Secretariat, Range Commanders Council, WSMR, NM.
- 3. Luers, James K., "A Method of Computing Winds, Density, Temperature, Pressure, and Their Associated Errors from the High Altitude Robin Sphere using an Optimum Filter," University of Dayton Research Institute, Jul 70.
- 4. Kennedy, Bruce W., and Delbert Bynum, "Army User Test Program for the RDT&E-XM-75 Meteorological Rocket," US Army Atmospheric Sciences Laboratory, WSMR, NM, Apr 76.
- 5. Johnson, S. G., "Application of Falling Sphere Technique to Artillery Meteorological System," Australian Defence Scientific Service Weapons Research Establishment, WRE Report 1665(WR&D), Salisbury, South Australia, Sep 76.

DISTRIBUTION LIST

Director
US Army Ballistic Research Laboratory
ATTN: DRDAR-BLB, Dr. G. E. Keller
Aberdeen Proving Ground, MD 21005

Air Force Weapons Laboratory ATTN: Technical Library (SUL) Kirtland AFB, NM 87117

Commander Headquarters, Fort Huachuca ATTN: Tech Ref Div Fort Huachuca, AZ 85613

6585 TG/WE Holloman AFB, NM 88330

Commandant
US Army Field Artillery School
ATTN: Morris Swett Tech Library
Fort Sill, OK 73503

Commandant USAFAS ATTN: ATSF-CD-MT (Mr. Farmer) Fort Sill, OK 73503

Director
US Army Engr Waterways Exper Sta
ATTN: Library Branch
Vicksburg, MS 39180

Commander
US Army Electronics Command
ATTN: DRSEL-CT-S (Dr. Swingle)
Fort Monmouth, NJ 07703
03

CPT Hugh Albers, Exec Sec Interdept Committee on Atmos Sci Fed Council for Sci & Tech National Sci Foundation Washington, DC 20550

Inge Dirmhirn, Professor Utah State University, UMC 48 Logan, UT 84322

HQDA (DAEN-RDM/Dr. De Percin) Forrestal Bldg Washington, DC 20314 Commander
US Army Aviation Cencer
ATTN: ATZQ-D-MA
Fort Rucker, AL 36362

CO, USA Foreign Sci & Tech Center ATTN: DRXST-ISI 220 7th Street, NE Charlottesville, VA 22901

Director
USAE Waterways Experiment Station
ATTN: Library
PO Box 631
Vicksburg, MS 39180

US Army Research Office ATTN: DRXRO-IP PO Box 12211 Research Triangle Park, NC 27709

Mr. William A. Main USDA Forest Service 1407 S. Harrison Road East Lansing, MI 48823

Library-R-51-Tech Reports Environmental Research Labs NOAA Boulder, CO 80302

Commander
US Army Dugway Proving Ground
ATTN: MT-S
Dugway, UT 84022

HQ, ESD/DRI/S-22 Hanscom AFB MA 01731

Head, Atmospheric Rsch Section National Science Foundation 1800 G. Street, NW Washington, DC 20550

Office, Asst Sec Army (R&D) ATTN: Dep for Science & Tech HQ, Department of the Army Washington, DC 20310 Commander
US Army Satellite Comm Agc
ATTN: DRCPM-SC-3
Fort Monmouth, NJ 07703

Sylvania Elec Sys Western Div ATTN: Technical Reports Library PO Box 205 Mountain View, CA 94040

William Peterson Research Association Utah State University, UNC 48 Logan, UT 84322

Defense Communications Agency Technical Library Center Code 205 Washington, DC 20305

Dr. A. D. Belmont Research Division PO Box 1249 Control Data Corp Minneapolis, MN 55440

Commander
US Army Electronics Command
ATTN: DRSEL-WL-D1
Fort Monmouth, NJ 07703

Commander ATTN: DRSEL-VL-D Fort Monmouth, NJ 07703

Meteorologist in Charge Kwajalein Missile Range PO Box 67 APO San Francisco, CA 96555

The Library of Congress ATTN: Exchange & Gift Div Washington, DC 20540 2

US Army Liaison Office MIT-Lincoln Lab, Library A-082 PO Box 73 Lexington, MA 02173 Dir National Security Agency ATTN: TDL (C513) Fort George G. Meade, MD 20755

Director, Systems R&D Service Federal Aviation Administration ATTN: ARD-54 2100 Second Street, SW Washington, DC 20590

Commander
US Army Missile Command
ATTN: DRSMI-RRA, Bldg 7770
Redstone Arsenal, AL 35809

Dir of Dev & Engr Defense Systems Div ATTN: SAREA-DE-DDR H. Tannenbaum Edgewood Arsenal, APG, MD 21010

Naval Surface Weapons Center Technical Library & Information Services Division White Oak, Silver Spring, MD 20910

Dr. Frank D. Eaton PO Box 3038 Universtiy Station Laramie, Wyoming 82071

Rome Air Development Center ATTN: Documents Library TILD (Bette Smith) Griffiss Air Force Base, NY 13441

National Weather Service National Meteorological Center World Weather Bldg - 5200 Auth Rd ATTN: Mr. Quiroz Washington, DC 20233

USAFETAC/CB (Stop 825) Scott AFB IL 62225

Director Defense Nuclear Agency ATTN: Tech Library Washington, DC 20305 Director
Development Center MCDEC
ATTN: Firepower Division
Quantico, VA 22134

Environmental Protection Agency Meteorology Laboratory Research Triangle Park, NC 27711

Commander
US Army Electronics Command
ATTN: DRSEL-GG-TD
Fort Monmouth, NJ 07703

Commander
US Army Ballistic Rsch Labs
ATTN: DRXBR-IB
APG, MD 21005

Dir, US Naval Research Lab Code 5530 Washington, DC 20375

Mil Assistant for Environmental Sciences DAD (E & LS), 3D129 The Pentagon Washington, DC 20301

The Environmental Rsch Institute of MI ATTN: IRIA Library PO Box 618 Ann Arbor, MI 48107

Armament Dev & Test Center ADTC (DLOSL) Eglin AFB, Florida 32542

Range Commanders Council ATTN: Mr. Hixon PMTC Code 3252 Pacific Missile Test Center Point Mugu, CA 93042

Commander
Eustis Directorate
US Army Air Mobility R&D Lab
ATTN: Technical Library
Fort Eustis, VA 23604

Commander
Frankford Arsenal
ATTN: SARFA-FCD-0, Bldg 201-2
Bridge & Tarcony Sts
Philadelphia, PA 19137

Director, Naval Oceanography and Meteorology National Space Technology Laboratories Bay St Louis, MS 39529

Commander
US Army Electronics Command
ATTN: DRSEL-CT-S
Fort Monmouth, NJ 07703

Commander
USA Cold Regions Test Center
ATTN: STECR-OP-PM
APO Seattle 98733

Redstone Scientific Information Center ATTN: DRDMI-TBD US Army Missile Res & Dev Command Redstone Arsenal, AL 35809

Commander
AFWL/WE
Kirtland AFB, NM 87117

Naval Surface Weapons Center Code DT-22 (Ms. Greeley) Dahlgren, VA 22448

Commander Naval Ocean Systems Center ATTN: Research Library San Diego, CA 92152

Commander
US Army INSCOM
ATTN: IARDA-OS
Arlington Hall Station
Arlington, VA 22212

and and the first of the

Commandant
US Army Field Artillery School
ATTN: ATSF-CF-R
Fort Sill, OK 73503

Commander and Director
US Army Engineer Topographic Labs
ETL-GS-AC
Fort Belvoir, VA 22060

Technical Processes Br-D823 NOAA, Lib & Info Serv Div 6009 Executive Blvd Rockville, MD 20852

Commander
US Army Missile Research
and Development Command
ATTN: DRDMI-CGA, B. W. Fowler
Redstone Arsenal, AL 35809

Commanding Officer
US Army Armament Rsch & Dev Com
ATTN: DRDAR-TSS #59
Dover, NJ 07801

Air Force Cambridge Rsch Labs ATTN: LCB (A. S. Carten, Jr.) Hanscom AFB Bedford, MA 01731

National Center for Atmos Res NCAR Library PO Box 3000 Boulder, CO 80307

Air Force Geophysics Laboratory ATTN: LYD Hanscom AFB Bedford, MA 01731

Chief, Atmospheric Sciences Division Code ES-81 NASA Marshall Space Flight Center, AL 35812

Department of the Air Force OL-C, 5WW Fort Monroe, VA 23651

Commander
US Army Missile Rsch & Dev Com
ATTN: DRDMI-TR
Redstone Arsenal, AL 35809

Meteorology Laboratory AFGL/LY Hanscom AFB, MA 01731

Director CFD US Army Field Artillery School ATTN: Met Division Fort Sill, OK 73503

. 7

Naval Weapons Center (Code 3173) ATTN: Dr. A. Shlanta China Lake, CA 93555

Director Atmospheric Physics & Chem Lab Code R31, NOAA Department of Commerce Boulder, CO 80302

Department of the Air Force 5 WW/DN Langley AFB, VA 23665

Commander
US Army Intelligence Center and School
ATTN: ATSI-CD-MD
Fort Huachuca, AZ 85613

Dr. John L. Walsh Code 4109 Navy Research Lab Washington, DC 20375

Director
US Army Armament Rsch & Dev Com
Chemical Systems Laboratory
ATTN: DRDAR-CLJ-I
Aberdeen Proving Ground, MD 21010

R. B. Girardo
Bureau of Reclamation
E&R Center, Code 1220
Denver Federal Center, Bldg 67
Denver, CO 80225

Commander
US Army Missile Command
ATTN: DRDMI-TEM
Redstone Arsenal, AL 35809

Commander
US Army Tropic Test Center
ATTN: STETC-MO (Tech Library)
APO New York 09827

Commanding Officer Naval Research Laboratory Code 2627 Washington, DC 20375

Defense Documentation Center ATTN: DDC-TCA Cameron Station (Bldg 5) Alexandria, Virginia 22314 12

Commander
US Army Test and Evaluation Command
ATTN: Technical Library
White Sands Missile Range, NM 88002

US Army Nuclear Agency ATTN: MONA-WE Fort Belvoir, VA 22060

Commander
US Army Proving Ground
ATTN: Technical Library
Bldg 2100
Yuma, AZ 85364

Office, Asst Sec Army (R&D) ATTN: Dep for Science & Tech HQ, Department of the Army Washington, DC 20310

ATMOSPHERIC SCIENCES RESEARCH PAPERS

- Lindberg, J.D., "An Improvement to a Method for Measuring the Absorption Coefficient of Atmospheric Dust and other Strongly Absorbing Powders," ECOM-5565, July 1975.
- Avara, Elton, P., "Mesoscale Wind Shears Derived from Thermal Winds," ECOM-5566, July 1975.
- Gomez, Richard B., and Joseph H. Pierluissi, "Incomplete Gamma Function Approximation for King's Strong-Line Transmittance Model," ECOM-5567, July 1975.
- 4. Blanco, A.J., and B.F. Engebos, "Ballistic Wind Weighting Functions for Tank Projectiles," ECOM-5568, August 1975.
- 5. Taylor, Fredrick J., Jack Smith, and Thomas H. Pries, "Crosswind Measurements through Pattern Recognition Techniques," ECOM-5569, July 1975.
- Walters, D.L., "Crosswind Weighting Functions for Direct-Fire Projectiles," ECOM-5570, August 1975.
- 7. Duncan, Louis D., "An Improved Algorithm for the Iterated Minimal Information Solution for Remote Sounding of Temperature," ECOM-5571, August 1975.
- 8. Robbiani, Raymond L., "Tactical Field Demonstration of Mobile Weather Radar Set AN/TPS-41 at Fort Rucker, Alabama," ECOM-5572, August 1975.
- 9. Miers, B., G. Blackman, D. Langer, and N. Lorimier, "Analysis of SMS/GOES Film Data," ECOM-5573, September 1975.
- Manquero, Carlos, Louis Duncan, and Rufus Bruce, "An Indication from Satellite Measurements of Atmospheric CO2 Variability," ECOM-5574, September 1975.
- 11. Petracca, Carmine, and James D. Lindberg, "Installation and Operation of an Atmospheric Particulate Collector," ECOM-5575, September 1975.
- Avara, Elton P., and George Alexander, "Empirical Investigation of Three Iterative Methods for Inverting the Radiative Transfer Equation," ECOM-5576, October 1975.
- Alexander, George D., "A Digital Data Acquisition Interface for the SMS Direct Readout Ground Station — Concept and Preliminary Design," ECOM-5577, October 1975.
- 14. Cantor, Israel, "Enhancement of Point Source Thermal Radiation Under Clouds in a Nonattenuating Medium," ECOM-5578, October 1975.
- Norton, Colburn, and Glenn Hoidale, "The Diurnal Variation of Mixing Height by Month over White Sands Missile Range, N.M," ECOM-5579, November 1975.
- Avara, Elton P., "On the Spectrum Analysis of Binary Data," ECOM-5580, November 1975.
- Taylor, Fredrick J., Thomas H. Pries, and Chao-Huan Huang, "Optimal Wind Velocity Estimation," ECOM-5581, December 1975.
- 18. Avara, Elton P., "Some Effects of Autocorrelated and Cross-Correlated Noise on the Analysis of Variance," ECOM-5582, December 1975.
- Gillespie, Patti S., R.L. Armstrong, and Kenneth O. White, "The Spectral Characteristics and Atmospheric CO2 Absorption of the Ho⁺³-YLF Laser at 2.05μm," ECOM-5583, December 1975.
- 20. Novlan, David J. "An Empirical Method of Forecasting Thunderstorms for the White Sands Missile Range," ECOM-5584, February 1976.
- 21. Avara, Elton P., "Randomization Effects in Hypothesis Testing with Autocorrelated Noise," ECOM-5585, February 1976.
- Watkins, Wendell R., "Improvements in Long Path Absorption Cell Measurement," ECOM-5586, March 1976.
- Thomas, Joe, George D. Alexander, and Marvin Dubbin, "SATTEL An Army Dedicated Meteorological Telemetry System," ECOM-5587. March 1976.
- 24. Kennedy, Bruce W., and Delbert Bynum, "Army User Test Program for the RDT&E-XM-75 Meteorological Rocket," ECOM-5588, April 1976.

- Barnett, Kenneth M., "A Description of the Artillery Meteorological Comparisons at White Sands Missle Range, October 1974 - December 1974 ('PASS' -Prototype Artillery [Meteorological] Subsystem)," ECOM-5589, April 1976.
- 26. Miller, Walter B., "Preliminary Analysis of Fall-of-Shot From Project 'PASS'," ECOM-5590, April 1976.
- Avara, Elton P., "Error Analysis of Minimum Information and Smith's Direct Methods for Inverting the Radiative Transfer Equation," ECOM-5591, April 1976.
 Yee, Young P., James D. Horn, and George Alexander, "Synoptic Thermal Wind Cal-
- 28. Yee, Young P., James D. Horn, and George Alexander, "Synoptic Thermal Wind Calculations from Radiosonde Observations Over the Southwestern United States," ECOM-5592, May 1976.
- 29. Duncan, Louis D., and Mary Ann Seagraves, "Applications of Empirical Corrections to NOAA-4 VTPR Observations," ECOM-5593, May 1976.
- 30. Miers, Bruce T., and Steve Weaver, "Applications of Meterological Satellite Data to Weather Sensitive Army Operations," ECOM-5594, May 1976.
- 31. Sharenow, Moses, "Redesign and Improvement of Balloon ML-566," ECOM-5595, June, 1976.
- 32. Hansen, Frank V., "The Depth of the Surface Boundary Layer," ECOM-5596, June 1976.
- 33. Pinnick, R.G., and E.B. Stenmark, "Response Calculations for a Commercial Light-Scattering Aerosol Counter," ECOM-5597, July 1976.
- 34. Mason, J., and G.B. Hoidale, "Visibility as an Estimator of Infrared Transmittance," ECOM-5598, July 1976.
- 35. Bruce, Rufus E., Louis D. Duncan, and Joseph H. Pierluissi, "Experimental Study of the Relationship Between Radiosonde Temperatures and Radiometric-Area Temperatures," ECOM-5599, August 1976.
- 36. Duncan, Louis D., "Stratospheric Wind Shear Computed from Satellite Thermal Sounder Measurements," ECOM-5800, September 1976.
- 37. Taylor, F., P. Mohan, P. Joseph and T. Pries, "An All Digital Automated Wind Measurement System," ECOM-5801, September 1976.
- 38. Bruce, Charles, "Development of Spectrophones for CW and Pulsed Radiation Sources," ECOM-5802, September 1976.
- 39. Duncan, Louis D., and Mary Ann Seagraves, "Another Method for Estimating Clear Column Radiances," ECOM-5803, October 1976.
- Blanco, Abel J., and Larry E. Taylor, "Artillery Meteorological Analysis of Project Pass," ECOM-5804, October 1976.
- 41. Miller, Walter, and Bernard Engebos," A Mathematical Structure for Refinement of Sound Ranging Estimates," ECOM-5805, November, 1976.
- Gillespie, James B., and James D. Lindberg, "A Method to Obtain Diffuse Reflectance Measurements from 1.0 to 3.0 μm Using a Cary 17I Spectrophotometer," ECOM-5806, November 1976.
- 43. Rubio, Roberto, and Robert O. Olsen, "A Study of the Effects of Temperature Variations on Radio Wave Absorption," ECOM-5807, November 1976.
- 44. Ballard, Harold N., "Temperature Measurements in the Stratosphere from Balloon-Borne Instrument Platforms, 1968-1975," ECOM-5808, December 1976.
- 45. Monahan, H.H., "An Approach to the Short-Range Prediction of Early Morning Radiation Fog," ECOM-5809, January 1977.
- Engebos, Bernard Francis, "Introduction to Multiple State Multiple Action Decision Theory and Its Relation to Mixing Structures," ECOM-5810, January 1977.
- 47. Low, Richard D.H., Effects of Cloud Particles on Remote Sensing from Space in the 10-Micrometer Infrared Region, ECOM-5811, January 1977.
- Bonner, Robert S., and R. Newton, "Application of the AN/GVS-5 Laser Rangefinder to Cloud Base Height Measurements," ECOM-5812, February 1977.

- Rubio, Roberto, "Lidar Detection of Subvisible Reentry Vehicle Erosive Atmospheric Material," ECOM-5813, March 1977.
- 50. Low, Richard D.H., and J.D. Horn, "Mesoscale Determination of Cloud-Top Height: Problems and Solutions," ECOM-5814, March 1977.
- 51. Duncan, Louis D., and Mary Ann Seagraves, "Evaluation of the NOAA-4 VTPR Thermal Winds for Nuclear Fallout Predictions," ECOM-5815, March 1977.
- 52. Randhawa, Jagir S., M. Izquierdo, Carlos McDonald and Zvi Salpeter, "Stratospheric Ozone Density as Measured by a Chemiluminescent Sensor During the Stratcom VI-A Flight," ECOM-5816, April 1977.
- 53. Rubio, Roberto, and Mike Izquierdo, "Measurements of Net Atmospheric Irradiance in the 0.7- to 2.8-Micrometer Infrared Region," ECOM-5817, May 1977.
- 54. Ballard, Harold N., Jose M. Serna, and Frank P. Hudson Consultant for Chemical Kinetics, "Calculation of Selected Atmospheric Composition Parameters for the Mid-Latitude, September Stratosphere," ECOM-5818, May 1977.
- 55. Mitchell, J.D., R.S. Sagar, and R.O. Olsen, "Positive Ions in the Middle Atmosphere During Sunrise Conditions," ECOM-5819, May 1977.
- White, Kenneth O., Wendell R. Watkins, Stuart A. Schleusener, and Ronald L. Johnson, "Solid-State Laser Wavelength Identification Using a Reference Absorber," ECOM-5820, June 1977.
- 57. Watkins, Wendell R., and Richard G. Dixon, "Automation of Long-Path Absorption Cell Measurements," ECOM-5821, June 1977.
- 58. Taylor, S.E., J.M. Davis, and J.B. Mason, "Analysis of Observed Soil Skin Moisture Effects on Reflectance," ECOM-5822, June 1977.
- 59. Duncan, Louis D. and Mary Ann Seagraves, "Fallout Predictions Computed from Satellite Derived Winds," ECOM-5823, June 1977.
- 60 Snider, D.E., D.G. Murcray, F.H. Murcray, and W.J. Williams, "Investigation of High-Altitude Enhanced Infrared Backround Emissions" (U), SECRET, ECOM-5824, June 1977.
- 61. Dubbin, Marvin H. and Dennis Hall, "Synchronous Meteorlogical Satellite Direct Readout Ground System Digital Video Electronics," ECOM-5525, June 1977
- 62. Miller, W., and B. Engebos, "A Preliminary Analysis of Two Sound Ranging Algorithms," ECOM-5826, July 1977.
- 63. Kennedy, Bruce W., and James K. Luers, "Ballistic Sphere Techniques for Measuring Atomspheric Parameters," ECOM-5827, July 1977.

\$US GOVERNMENT PRINTING OFFICE: 1977 777-022/11